



W9

High-performance in rugged VISTAL® housing

PHOTOELECTRIC SENSORS

SICK
Sensor Intelligence.


Advantages



Reliable detection for a diverse range of objects

The rugged photoelectric sensors of the W9 product family reliably detect objects and items regardless of the type or quality. The W9 achieves high sensing ranges thanks to the PinPoint LED and laser technology. The portfolio contains photoelectric proximity sensors with excellent background suppression, photoelectric retro-reflective sensors with autocollimation optics and through-beam photoelectric sensors. The W9 thereby offers the right principle of operation for any detection task.


Excellent detection properties

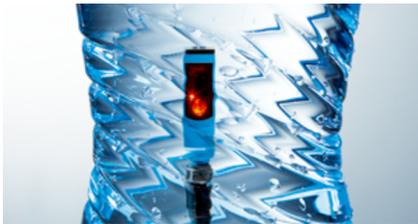

Undefeated in the detection of transparent objects thanks to the ClearSens technology



Universal application possibilities due to the excellent background suppression

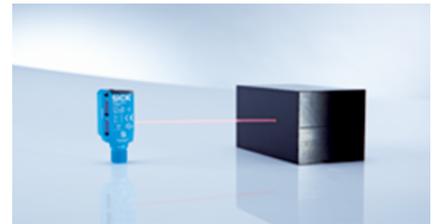

The newest laser technology for the safe detection of small objects and fine details



With the extensive detection principles, the W9 product family has a reliable sensor solution for any detection task



Extremely rugged with flexible installation

The rugged VISTAL™ housing offers very high mechanical stability and therefore high sensor availability. The use of glass-fiber reinforced plastic combined with high-performance adhesives ensures excellent housing sealing and makes it resistant to cleaning agents. The laser inscription is easy to read even if the sensor has already been in use for years.



Rugged VISTAL™ housing offers maximum mechanical stability



Housing variants for M3 and M4 fixing screws Slots make it possible to move the sensor on the screw



Diverse connection concepts: M8 and M12 male connector, cable as well as cable with M12 male connector



For mounting, adjustment and connection, the W9 product family offers nearly unlimited possibilities



Technical data overview

Dimensions (W x H x D)	12.2 mm x 49.8 mm x 23.6 mm 12.2 mm x 52.2 mm x 23.6 mm 12.2 mm x 50 mm x 23.6 mm 12.2 mm x 52.5 mm x 23.6 mm 12 mm x 40 mm x 22 mm
Sensing range max.	20 mm ... 350 mm ¹⁾ ≤ 98 mm 50 mm ... 175 mm ¹⁾ 20 mm ... 500 mm ¹⁾ 20 mm ... 100 mm ¹⁾ 20 mm ... 800 mm ¹⁾ 20 mm ... 200 mm ¹⁾ 0 m ... 4 m ²⁾ 0 m ... 5 m ²⁾ 0 m ... 0.4 m ²⁾ 0 mm ... 290 mm ³⁾ 20 mm ... 600 mm ¹⁾ 0 m ... 10 m 20 mm ... 400 mm ¹⁾ 0 m ... 13 m 0 m ... 0.7 m ⁴⁾ 30 mm ... 150 mm ¹⁾ 0.1 m ... 12 m ²⁾ 0 m ... 50 m 25 mm ... 300 mm ¹⁾ 25 mm ... 400 mm ¹⁾ 0 m ... 12 m ²⁾ 0 m ... 60 m 0 m ... 4.5 m ^{5) 6)} 0 m ... 3.5 m ^{5) 6)}
Light source	PinPoint LED LED Laser (depending on type)
Type of light	Visible red light Infrared light Visible blue light (depending on type)
Enclosure rating	IP66 IP67 IP69K
Housing material	Plastic VISTAL® Plastic ABS
Adjustment	Potentiometer, 5 turns None IO-Link Single teach-in button Cable Light/dark switching, switchable Potentiometer, 7 turns

¹⁾ Object with 90 % reflectance (referred to standard white, DIN 5033).

²⁾ Reflector PL80A.

³⁾ Reflective tape REF-IRF-56.

⁴⁾ Reflective tape Diamond Grade.

⁵⁾ Reflective tape REF-AC1000.

⁶⁾ To ensure reliable operation, we recommend using REF-AC1000 reflective tape or reflective-tap reflectors such as P41F, PLV14-A, PLH25-M12, or PLH25-D12. Reflectors with large-scale triple structures must only be used if deemed suitable for the application.

Product description

Precise detection of small objects and object features. Reliable for use in harsh industrial environments: The W9 photoelectric sensor family offers a wider range of solutions than ever before. It is a complete product family, including photoelectric proximity sensors as well as photoelectric retro-reflective sensors and through-beam photoelectric sensors. All sensors are equipped with the latest laser and LED technology, protected by a rugged VISTAL® housing – for even stronger mechanical resistance. The W9 range works using SICK's SIRIC® technology; optical and electromagnetic interference is effectively suppressed in any environment. With the addition of various connection, mounting and sensing options, the W9 sensor family is the ideal solution for a variety of application needs in the automation environment.

At a glance

- Rugged VISTAL™ housing
- PinPoint LED or laser
- Photoelectric proximity sensor with sensing range of up to 800 mm
- Photoelectric retro-reflective sensors with autocollimation optics
- Through-beam photoelectric sensors with sensing ranges of up to 60 m
- SIRIC technology
- Connections: M8 and M12 male connector, cable as well as cable with male connector
- M3 and M4 hole pattern

Your benefits

- Precise detection of small objects and object features
- Detection of objects even through small openings
- Less machine downtime due to stable VISTAL™ housing as well as the suppression of optical interference
- The longest detection and sensing ranges in its class
- Best-in-class background suppression for photoelectric proximity sensors
- No blind spots, detection of shiny or transparent objects using photoelectric retro-reflective sensors
- A wide variety of connection and mounting options
- Highly visible light spot simplifies alignment

Fields of application

- Detection of the smallest work pieces or fine details on products
- Detection through narrow openings
- Checks for protrusions or misalignment
- Detection of objects within a short distance from difficult backgrounds
- Detection of transparent objects
- Object detection in harsh industrial environments

Ordering information

Other models and accessories → www.sick.com/W9

- **Sensor principle:** Photoelectric proximity sensor
- **Detection principle:** Background suppression
- **Light source:** PinPoint LED
- **Voltage type:** DC
- **Switching mode:** Light/dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
20 mm ... 350 mm	NPN	Potentiometer	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	WTB9-3N3461	1070769

¹⁾ Do not bend below 0 °C.

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.		
			Cable, 4-wire, 2 m ¹⁾	WTB9-3N1161	1049052		
				WTB9M4-3N1161	1051882		
			Male connector M12, 4-pin	WTB9-3N2461	1049053		
			Male connector M8, 4-pin	WTB9M4-3N2261	1051885		
	PNP	Potentiometer	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	WTB9-3P3461	1049051		
				WTB9M4-3P3461	1054429		
			Cable with M8 male connector, 4-pin, 120 mm ¹⁾	WTB9-3P3261	1054306		
			Cable with M8 male connector, 4-pin, 200 mm ¹⁾	WTB9-3P3061S18	1052896		
			Cable, 4-wire, 2 m ¹⁾	WTB9-3P1161	1049043		
				WTB9M4-3P1161	1051887		
			Cable, 4-wire, 5 m ¹⁾	WTB9-3P1261	1049044		
			Male connector M12, 4-pin	WTB9-3P2461	1049049		
				WTB9M4-3P2461	1051891		
			Male connector M8, 4-pin	WTB9-3P2261	1049047		
				WTB9M4-3P2261	1051889		
			Cable, Teach-in button		Cable with M12 male connector, 4-pin, 120 mm	WTB9C-3P3462A00	1098209
						WTB9C-3P1162A00	1104228
					Male connector M12, 4-pin	WTB9C-3P2462A00	1080924
						WTB9C-3P2462A70	1080925
			WTB9C-3P2462A71	1080926			
20 mm ... 400 mm	PNP	Potentiometer	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	WTB9M4-3P3461S19	1064722		
50 mm ... 175 mm	PNP	Potentiometer		WTB9-3P3461S08	1091757		
≤ 98 mm	PNP	None	Male connector M12, 4-pin	WTB9-3P2400S03	1054717		

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Photoelectric proximity sensor
- **Detection principle:** Background suppression
- **Light source:** PinPoint LED
- **Voltage type:** DC
- **Switching mode:** Light switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
20 mm ... 350 mm	PNP	Potentiometer	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	WTB9-3P3461S13	1050772
			Cable with connector M8, 3-pin, 120 mm ¹⁾	WTB9-3P3161	1052931

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Photoelectric proximity sensor
- **Detection principle:** Background suppression
- **Light source:** PinPoint LED
- **Voltage type:** DC
- **Switching mode:** Dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
20 mm ... 350 mm	PNP	Potentiometer	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	WTB9-3F3461S06	1051057

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Photoelectric proximity sensor
- **Detection principle:** Background suppression
- **Light source:** LED
- **Voltage type:** DC
- **Switching mode:** Light/dark switching
- **Type of light:** Infrared light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
20 mm ... 100 mm	PNP	None	Male connector M12, 4-pin	WTB9-3P2410S20	1114015
20 mm ... 350 mm	PNP	Potentiometer	Male connector M12, 4-pin	WTB9-3P2411S09	1093450

¹⁾ Do not bend below 0 °C.

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
20 mm ... 500 mm	NPN	Potentiometer	Male connector M12, 4-pin	WTB9M4-3N2411	1055145
			PNP	Potentiometer	Cable with M12 male connector, 4-pin, 120 mm ¹⁾
	WTB9M4-3P3411	1054430			
	Cable, 4-wire, 2 m ¹⁾	WTB9-3P1111			1049042
		WTB9M4-3P1111			1051886
	Male connector M12, 4-pin	WTB9-3P2411			1049048
		WTB9M4-3P2411			1051890
	Male connector M8, 4-pin	WTB9-3P2211			1049045
		WTB9M4-3P2211			1051888
	20 mm ... 800 mm	NPN	Potentiometer	Cable, 4-wire, 2 m ¹⁾	WTB9-3N1111S14
PNP				Potentiometer	Cable with JST-connector, 450 mm ¹⁾
		Cable with M12 male connector, 4-pin, 120 mm ¹⁾	WTB9-3P3411S14		
			WTB9M4-3P3411S14		1054431
		Cable, 4-wire, 2 m ¹⁾	WTB9-3P1111S14		1052173
		Male connector M12, 4-pin	WTB9-3P2411S14		1052172
			WTB9-3P2411P10		1116355
Male connector M8, 4-pin		WTB9-3P2211S14	1052171		

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Photoelectric proximity sensor
- **Detection principle:** Background suppression
- **Light source:** LED
- **Voltage type:** DC
- **Switching mode:** Dark switching
- **Type of light:** Infrared light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
20 mm ... 500 mm	PNP	Potentiometer	Cable with connector M8, 3-pin, 120 mm ¹⁾	WTB9-3F3111	1058892

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Photoelectric proximity sensor
- **Detection principle:** Background suppression
- **Light source:** LED
- **Voltage type:** DC
- **Switching mode:** Light/dark switching
- **Type of light:** visible blue light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
20 mm ... 200 mm	PNP	Potentiometer	Male connector M8, 4-pin	WTB9-3P2281	1094676

- **Sensor principle:** Photoelectric retro-reflective sensor
- **Detection principle:** autocollimation
- **Light source:** PinPoint LED
- **Voltage type:** DC
- **Switching mode:** Light/dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
0 m ... 0.4 m	NPN	Teach-in button	Cable, 4-wire, 2 m ¹⁾	WL9-3N1162	1049068
			Male connector M12, 4-pin	WL9-3N2462	1049072
	PNP	Teach-in button	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	WL9-3P3462	1049065
			Cable with connector M8, 3-pin, 120 mm ¹⁾	WL9-3P3162	1054424
			Cable, 4-wire, 2 m ¹⁾	WL9-3P1162	1049054
			Male connector M12, 4-pin	WL9-3P2462	1049061
			Male connector M8, 4-pin	WL9-3P2262	1049058
0 m ... 4 m	NPN	None	Cable, 4-wire, 2 m ¹⁾	WL9-3N1130	1049069
			Male connector M12, 4-pin	WL9-3N2430	1049073
			Male connector M8, 4-pin	WL9-3N2230	1049071
	PNP	None	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	WL9-3P3430	1049066
			Cable, 4-wire, 2 m ¹⁾	WL9-3P1130	1049055
			Male connector M12, 4-pin	WL9-3P2430	1049062
			Male connector M8, 4-pin	WL9-3P2230	1049059

¹⁾ Do not bend below 0 °C.

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.	
0 m ... 5 m	NPN	Teach-in button	Cable, 4-wire, 2 m ¹⁾	WL9-3N1132	1049070	
				WL9M4-3N1132	1051892	
				WL9G-3N1132	1049085	
				WL9G-3N1132P05	1057477	
				WL9G-3N1132P06	1061788	
				WL9G-3N1132P11	1054637	
		Teach-in button	Male connector M12, 4-pin	WL9-3N2432	1049074	
				WL9G-3E2432	1096364	
			Male connector M12, 4-pin	WL9G-3N2432	1054152	
				Male connector M8, 4-pin	WL9M4-3N2232	1051893
					WL9M4-3E2230S14	1102002
				PNP	Teach-in button	Cable with M12 male connector, 4-pin, 120 mm ¹⁾
	WL9M4-3P3432	1051907				
	WL9G-3P3432	1049084				
	WL9G-3P3432S03	1084970				
	WL9M4G-3P3432	1051910				
	WL9-3P3032S28	1052899				
	0 m ... 5 m	PNP	Teach-in button	Cable with M8 male connector, 4-pin, 200 mm ¹⁾	WL9G-3P3232	1057499
Cable, 4-wire, 2 m ¹⁾					WL9-3P1132	1049056
				WL9M4-3P1132	1051894	
				WL9G-3P1132P07	1064368	
				WL9G-3P1132	1049081	
				WL9G-3P1132P10	1054636	
				WL9M4G-3P1132	1051898	
Cable, 4-wire, 5 m ¹⁾				WL9-3P1232	1049057	
				Male connector M12, 4-pin	WL9-3P2432	1049063
WL9M4-3P2432					1051896	

¹⁾ Do not bend below 0 °C.

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.	
				WL9G-3P2432	1049083	
				WL9M4G-3P2432	1051900	
			Male connector M8, 4-pin	WL9-3P2232	1049060	
				WL9-3P2232S02	1057798	
				WL9-3P2232S09	1084889	
				WL9-3P2232S10	1084890	
				WL9M4-3P2232	1051895	
				WL9M4-3P2230S11	1099663	
				WL9G-3P2232	1049082	
				WL9G-3F2232	1064168	
		WL9M4G-3P2232	1051899			
		Cable, Teach-in button	Cable with M12 male connector, 4-pin, 120 mm	WL9C-3P3432A00	1098210	
				WL9GC-3P3432A00	1125678	
			Cable with M12 male connector, 4-pin, 168 mm ¹⁾	Male connector M12, 4-pin	WL9C-3P2432A00	1080915
					WL9C-3P2432A70	1080916
				WL9C-3P2432A71	1080917	
				WL9GC-3P2432A00	1080918	
		WL9GC-3P2432A70	1080919			
		WL9GC-3P2432A71	1080920			
		None	Cable with M12 male connector, 4-pin, 290 mm ¹⁾	WL9-3P3030S01	1050913	
0 mm ... 290 mm	NPN	Teach-in button	Cable, 4-wire, 2 m ¹⁾	WL9-3N1102P08	1076073	
				WL9-3N1102S07	1076074	

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Photoelectric retro-reflective sensor
- **Detection principle:** autocollimation
- **Light source:** PinPoint LED
- **Voltage type:** DC
- **Switching mode:** Light switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
0 m ... 0.7 m	NPN	Teach-in button	Cable, 4-wire, 5 m ¹⁾	WL9G-3N1234S02	1058701
0 m ... 4 m	PNP	None	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	WL9-3P3430S12	1051054
			Cable with connector M8, 3-pin, 120 mm ¹⁾	WL9-3P3130	1065065
			Cable, 4-wire, 2.6 m ¹⁾	WL9-3P1030S17	1062874
			Male connector M8, 4-pin	WL9-3P2230S03	1067948
0 m ... 5 m	PNP	Teach-in button	Cable with connector M8, 3-pin, 120 mm ¹⁾	WL9-3P3132	1050917
			Male connector M12, 4-pin	WL9M4G-3P2434	1067619
		Teach-in button, cable	Male connector M8, 4-pin	WL9M4-3P2234	1051906
		Cable, Teach-in button	Male connector M12, 4-pin	WL9G-3P2434	1054599
			Male connector M8, 4-pin	WL9G-3P2234	1054598
			WL9M4G-3P2234	1073995	

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Photoelectric retro-reflective sensor
- **Detection principle:** autocollimation
- **Light source:** PinPoint LED
- **Voltage type:** DC
- **Switching mode:** Dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
0 m ... 4 m	PNP	None	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	WL9-3F3430S04	1051055
			Cable with connector M8, 3-pin, 120 mm ¹⁾	WL9-3F3130	1051056
0 m ... 5 m	PNP	Teach-in button	Cable, 4-wire, 2 m ¹⁾	WL9M4-3V1132	1051908
			Male connector M8, 4-pin	WL9M4-3V2232	1051909
		Teach-in button, cable	WL9G-3F2232S01	1058103	
Male connector M8, 4-pin	WL9-3F2234S20		1050928		

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Photoelectric retro-reflective sensor
- **Detection principle:** autocollimation
- **Light source:** PinPoint LED
- **Switching mode:** Light/dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
0 m ... 4 m	PNP	None	Cable with M8 male connector, 4-pin, 200 mm ¹⁾	WL9-3P3030S27	1052898

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Photoelectric proximity sensor
- **Detection principle:** Foreground suppression
- **Light source:** PinPoint LED
- **Voltage type:** DC
- **Switching mode:** Light/dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
20 mm ... 350 mm	PNP	Potentiometer	Male connector M12, 4-pin	WTF9-3P2461	1052990
			Male connector M8, 4-pin	WTF9-3P2261P03	1053767
		Cable, Teach-in button		Male connector M12, 4-pin	WTF9-3P2261S01
			WTF9C-3P2462A00		1099064

- **Sensor principle:** Photoelectric proximity sensor
- **Detection principle:** Foreground suppression
- **Light source:** LED
- **Voltage type:** DC
- **Switching mode:** Light/dark switching
- **Type of light:** Infrared light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
20 mm ... 600 mm	PNP	Potentiometer	Cable with MOLEX-connector	WTF9-3P3011S05	1084601

- **Sensor principle:** Through-beam photoelectric sensor
- **Light source:** PinPoint LED
- **Voltage type:** DC
- **Switching mode:** Light/dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.	
0 m ... 10 m	NPN	None	Cable, 4-wire, 2 m ¹⁾	WSE9-3N1130	1049079	
				WSE9M4-3N1130	1051914	
			Male connector M12, 4-pin	WSE9-3N2430	1049080	
				WSE9-3N2230	1055041	
			Male connector M8, 4-pin	WSE9M4-3N2230	1052938	
				WSE9C-3P2430A00	1080921	
	PNP	Cable	Male connector M12, 4-pin	WSE9C-3P2430A70	1080922	
				WSE9C-3P2430A71	1080923	
				WSE9-3P3430	1049078	
			None	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	WSE9M4-3P3430	1054435
					WSE9-3P3230	1056568
			Cable with M8 male connector, 4-pin, 120 mm ¹⁾	Cable, 4-wire, 2 m ¹⁾	WSE9-3P1130	1049075
		WSE9M4-3P1130			1051911	
		Male connector M12, 4-pin	Male connector M12, 4-pin	WSE9-3P2430	1049077	
				WSE9M4-3P2430	1051913	
			Male connector M8, 4-pin	WSE9-3P2230	1049076	
				WSE9-3P2230S05	1073459	
		WSE9M4-3P2230	1051912			

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Through-beam photoelectric sensor
- **Light source:** PinPoint LED
- **Voltage type:** DC
- **Switching mode:** Dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
0 m ... 10 m	PNP	None	Sender: cable with JST PHR male connector, 2-pin, 450 mm ¹⁾	WSE9-3F3030S06	1092578

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Through-beam photoelectric sensor
- **Light source:** LED
- **Voltage type:** DC
- **Switching mode:** Light/dark switching
- **Type of light:** Infrared light

Sensing range max.	Switching output	Adjustment	Connection type	Type	Part no.
0 m ... 13 m	PNP	None	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	WSE9M4-3P3410S02	1065465

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Photoelectric proximity sensor
- **Detection principle:** Background suppression
- **Light source:** laser
- **Voltage type:** DC
- **Switching mode:** Light/dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Laser class	Type	Part no.	
25 mm ... 300 mm	NPN	Potentiometer	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	1	WTB9L-3N3461	1062525	
			Male connector M12, 4-pin	1	WTB9L-3N2461	1062524	
			Male connector M8, 4-pin	1	WTB9L-3N2261	1062523	
	PNP	Potentiometer	Cable with M12 male connector, 4-pin, 120 mm ¹⁾		1	WTB9L-3P3461	1058916
						1	WTB9M4L-3P3461
			Cable with M8 male connector, 4-pin, 120 mm ¹⁾		1	WTB9L-3P3261S03	1073333
				Cable, 4-wire, 2 m ¹⁾		1	WTB9L-3P1161
						1	WTB9M4L-3P1161
			Male connector M12, 4-pin		1	WTB9L-3P2461	1058231
						1	WTB9M4L-3P2461
			Male connector M8, 4-pin		1	WTB9L-3P2261	1058230
						1	WTB9M4L-3P2261
	Cable, Teach-in button	Male connector M12, 4-pin		1	WTB9LC-3P2462A00	1080942	
					1	WTB9LC-3P2462A70	1080943
					1	WTB9LC-3P2462A71	1080944

¹⁾ Do not bend below 0 °C.

Sensing range max.	Switching output	Adjustment	Connection type	Laser class	Type	Part no.
25 mm ... 400 mm	NPN	Potentiometer	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	2	WTB9L-3N3491	1058152
			Cable, 4-wire, 2 m ¹⁾	2	WTB9L-3N1191	1068515
			Male connector M12, 4-pin	2	WTB9L-3N2491	1058149
			Male connector M8, 4-pin	2	WTB9L-3N2291	1058146
	PNP	Potentiometer	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	2	WTB9L-3P3491	1058153
			Cable, 4-wire, 2 m ¹⁾	2	WTB9M4L-3P1191	1058226
			Male connector M12, 4-pin	2	WTB9L-3P2491	1058151
					WTB9M4L-3P2491	1058225
			Male connector M8, 4-pin	2	WTB9L-3P2291	1058150
					WTB9M4L-3P2291	1058224
			Cable, Teach-in button	2	WTB9LC-3P3492A00	1125677
			30 mm ... 150 mm	NPN	Potentiometer	Male connector M12, 4-pin
Male connector M8, 4-pin	2	WT9L-N330				1023991
PNP	Potentiometer	Male connector M12, 4-pin		2	WT9L-P430	1023959
		Male connector M8, 4-pin		2	WT9L-P330	1023977

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Photoelectric retro-reflective sensor
- **Detection principle:** Dual lens
- **Light source:** laser
- **Voltage type:** DC
- **Switching mode:** Light/dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Laser class	Type	Part no.
0.1 m ... 12 m	NPN	Teach-in button	Male connector M12, 4-pin	2	WL9L-N430	1023988
			Male connector M8, 4-pin	2	WL9L-N330	1023989
	PNP	Teach-in button	Male connector M12, 4-pin	2	WL9L-P430	1023958
			Male connector M8, 4-pin	2	WL9L-P330	1023976

- **Sensor principle:** Through-beam photoelectric sensor
- **Light source:** laser
- **Voltage type:** DC
- **Switching mode:** Light/dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Laser class	Type	Part no.
0 m ... 50 m	NPN	Teach-in button	Male connector M12, 4-pin	2	WS/WE9L-N430	1023994
			Male connector M8, 4-pin	2	WS/WE9L-N330	1023995
	PNP	Teach-in button	Male connector M12, 4-pin	2	WS/WE9L-P430	1023992
			Male connector M8, 4-pin	2	WS/WE9L-P330	1023993

¹⁾ Do not bend below 0 °C.

Sensing range max.	Switching output	Adjustment	Connection type	Laser class	Type	Part no.		
0 m ... 60 m	NPN	Teach-in button	Cable, 4-wire, 2 m ¹⁾	1	WSE9L-3N1137	1065567		
			Male connector M12, 4-pin	1	WSE9L-3N2437	1058180		
			Male connector M8, 4-pin	1	WSE9L-3N2237	1058179		
	PNP	Teach-in button	Cable, 4-wire, 2 m ¹⁾		1	WSE9L-3P1137	1058915	
					1	WSE9L-3P2437	1058181	
					1	WSE9L-3P2237	1058182	
		Cable	Cable	Male connector M12, 4-pin		1	WSE9LC-3P2436A00	1080958
							WSE9LC-3P2436A70	1080960
							WSE9LC-3P2436A71	1080962
		Cable, Teach-in button	Cable, Teach-in button	Cable with M12 male connector, 4-pin, 120 mm		1	WSE9LC-3P3436A00	1098211

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Photoelectric retro-reflective sensor
- **Detection principle:** autocollimation
- **Light source:** laser
- **Voltage type:** DC
- **Switching mode:** Light/dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Laser class	Type	Part no.	
0 m ... 12 m	NPN	Teach-in button	Cable, 4-wire, 2 m ¹⁾	1	WL9L-3N1132	1065640	
			Male connector M12, 4-pin	1	WL9L-3N2432	1058173	
			Male connector M8, 4-pin	1	WL9L-3N2232	1058172	
	PNP	Teach-in button	Cable with M12 male connector, 4-pin, 120 mm ¹⁾	1	WL9L-3P3432	1058176	
			Cable with M8 male connector, 4-pin, 200 mm ¹⁾	1	WL9L-3P3032S04	1119113	
			Cable, 4-wire, 2 m ¹⁾	1	WL9L-3P1132	1058233	
				1	WL9M4L-3P1132	1058229	
			Male connector M12, 4-pin	1	WL9L-3P2432	1058175	
				1	WL9L-3P2432S01	1058177	
				1	WL9L-3P2432S03	1078396	
			Male connector M8, 4-pin	1	WL9M4L-3P2432	1058228	
				1	WL9L-3P2232	1058174	
				1	WL9M4L-3P2232	1058227	
			Cable, Teach-in button	Cable with M12 male connector, 4-pin, 120 mm	1	WL9LC-3P3432A00	1098212
				Male connector M12, 4-pin	1	WL9LC-3P2432A00	1080946
1	WL9LC-3P2432A70	1080948					
0 m ... 3.5 m	PNP	Teach-in button	Cable, 4-wire, 2 m ¹⁾	1	WL9LG-3P1152	1076049	
			Male connector M12, 4-pin	1	WL9LG-3P2452	1076048	
			Male connector M8, 4-pin	1	WL9LG-3P2252	1076047	
		Cable, Teach-in button	Male connector M12, 4-pin	1	WL9LGC-3P2452A00	1080952	
				1	WL9LGC-3P2452A70	1080954	
				1	WL9LGC-3P2452A71	1080956	

¹⁾ Do not bend below 0 °C.

Sensing range max.	Switching output	Adjustment	Connection type	Laser class	Type	Part no.
0 m ... 4.5 m	PNP	Teach-in button	Cable, 4-wire, 2 m ¹⁾	1	WL9LG-3P1132	1058236
			Male connector M12, 4-pin	1	WL9LG-3P2432	1058235
			Male connector M8, 4-pin	1	WL9LG-3P2232	1058234

¹⁾ Do not bend below 0 °C.

- **Sensor principle:** Photoelectric retro-reflective sensor
- **Detection principle:** autocollimation
- **Light source:** laser
- **Voltage type:** DC
- **Switching mode:** Dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Laser class	Type	Part no.
0 m ... 12 m	PNP	Teach-in button	Male connector M12, 4-pin	1	WL9L-3P2432S02	1058178

- **Sensor principle:** Photoelectric retro-reflective sensor
- **Detection principle:** autocollimation
- **Light source:** laser
- **Switching mode:** Light/dark switching
- **Type of light:** visible red light

Sensing range max.	Switching output	Adjustment	Connection type	Laser class	Type	Part no.
0 m ... 4.5 m	PNP	Cable, Teach-in button	Male connector M8, 4-pin	1	WL9LGC-3P2232B01	1106618

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com